


Flange valve FAB

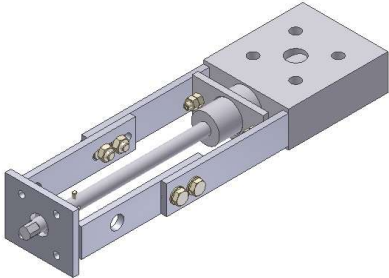

Nominal sizes:

DN 4 to DN 32

Full pass

Flange connection:


To be mounted between flanges

PN6-16 n. DIN 2631 - 2633

Temperature range:

Up to 800°C

The temperature resistance depends on the pressure.

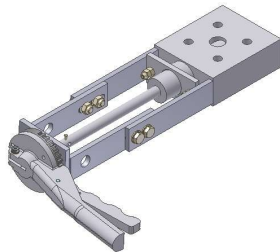


Types:

Swing-through

Leakage ~0,3% (KVS-Value)


Leakage depends on temperature, pressure and nominal size

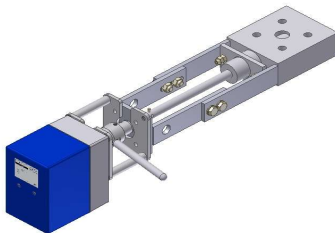

Materials:

Housing, valve plate ,shaft : 1.0038 / 1.0570 / 1.4301
1.4541 / 1.4878 / 1.4828
1.4841

Other materials on request

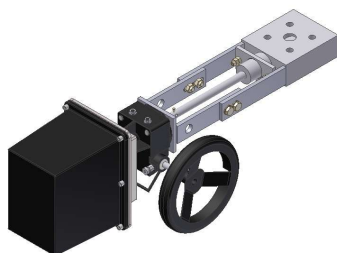

Shaft sealings:

adjustable packing box or O-rings

Variants:

manual, electric, pneumatic

