
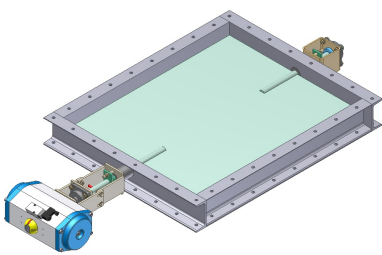
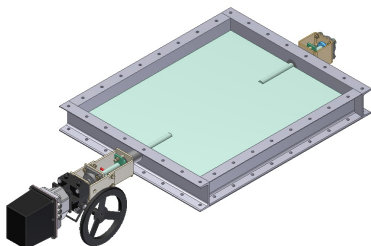
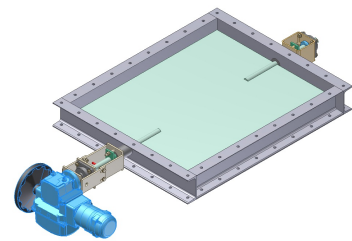


Rectangle valve RKB



Nominal sizes:

Length / width: 100 – 1500mm

Connections:

To be mounted between flanges
DIN 24193 – R3

Temperature range:

Up to 1100°C

The temperature resistance depends on the pressure.

Valve types:

Swing-through

Leakage ~1,5% (KVS- Value)

Stop-bar

Leakage ~1,0% (KVS- Value)

Fins execution

Leakage depends on temperature, pressure and nominal size.

Materials:

Housing, valve plate, shaft

1.0038 / 1.0570 / 1.4301

1.4541 / 1.4878 / 1.4828

1.4841

Other materials on request

Shaft sealings:

Adjustable packaging box or O-rings

Variants:

manual, electric, pneumatic