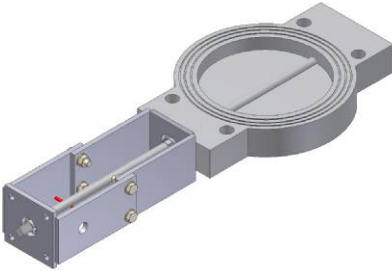
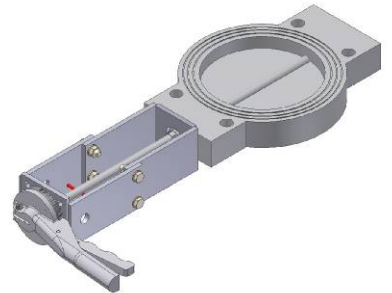
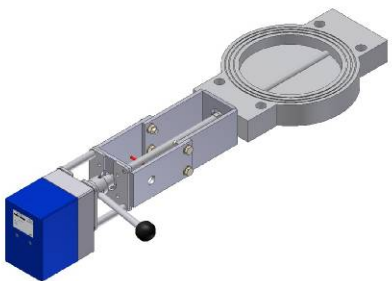

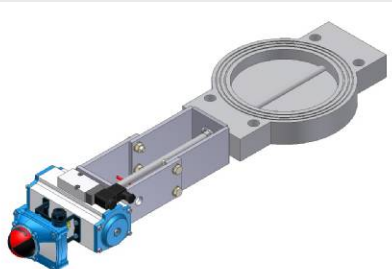



Butterfly valve RDB-S

	<p>Nominal sizes: DN 80 to DN 1200</p>						
	<p>Flange connection To be mounted between flanges PN6-16 n. DIN 2631 - 2633</p>						
	<p>Temperature range: Up to 1100°C</p> <p>The temperature resistance depends on the pressure.</p>						
	<p>Valve types:</p> <table border="0"> <tr> <td>Swing-through</td> <td>Leakage ~1,0% (KVS-Value)</td> </tr> <tr> <td>Stop bar</td> <td>Leakage ~0,3% (KVS-Value)</td> </tr> <tr> <td>Stop bar + packing insert</td> <td>Leakage ~0,1% (KVS-Value)</td> </tr> </table> <p>Leakage depends on temperature, pressure and nominal size</p>	Swing-through	Leakage ~1,0% (KVS-Value)	Stop bar	Leakage ~0,3% (KVS-Value)	Stop bar + packing insert	Leakage ~0,1% (KVS-Value)
Swing-through	Leakage ~1,0% (KVS-Value)						
Stop bar	Leakage ~0,3% (KVS-Value)						
Stop bar + packing insert	Leakage ~0,1% (KVS-Value)						
	<p>Materials:</p> <table border="0"> <tr> <td>Housing, valve plate, shaft</td> <td>1.0038 / 1.0570 / 1.4301, 1.4541 / 1.4878 / 1.4828 / 1.4841</td> </tr> </table> <p>Other materials on request</p>	Housing, valve plate, shaft	1.0038 / 1.0570 / 1.4301, 1.4541 / 1.4878 / 1.4828 / 1.4841				
Housing, valve plate, shaft	1.0038 / 1.0570 / 1.4301, 1.4541 / 1.4878 / 1.4828 / 1.4841						
	<p>Shaft sealings: adjustable packing box or O-rings</p>						
	<p>Variants: manual, electric, pneumatic</p>						